


**480Y/277 VOLTS
MAIN CIRCUIT BREAKERS
FOR
ERICKSON ELECTRICAL EQUIPMENT CO.
COMMERCIAL METERING PANELBOARDS
(NON INTERCHANGEABLE WITH 240V. UNITS)**

FEATURES:



- TYPE 3R ENCLOSURES FOR OUTDOOR OR INDOOR INSTALLATION.
- SHORT CIRCUIT CURRENT RATINGS OF MAIN CIRCUIT BREAKERS ARE 35,000 TO 65,000 RMS SYM. AMPS, HOWEVER THE SHORT CIRCUIT CURRENT RATING OF THE METER CENTER IS LIMITED TO THE SHORT CIRCUIT RATINGS OF BRANCH OVERCURRENT DEVICES.
- LISTED BY UNDERWRITERS LABORATORIES INC, UNDER FILE E80799, 'ADAPTERS, CIRCUIT BREAKER'
- COPPER BUS BAR, SILVER PLATED OR TIN PLATED
- MAIN LUGS ARE SUITABLE FOR COPPER OR ALUMINUM CONDUCTORS.
- ALUMINUM ENCLOSURES NEVER RUST, INSTALL EASILY.

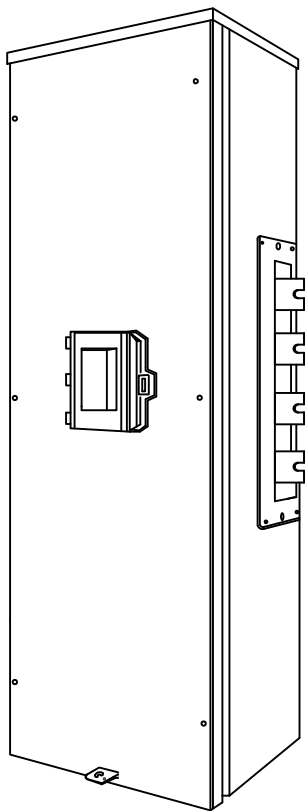


APPLICATION: FOR USE WITH ERICKSON TYPE '6CM' COMMERCIAL METERING PANELBOARDS AND OTHER METERING EQUIPMENT WHERE MAIN CIRCUIT BREAKERS ARE INDICATED OR DESIRED.

RATINGS: 400, 600 AND 800 AMPS. SIZES ARE AVAILABLE.

www.ericksonelectric.com

**ERICKSON ELECTRICAL EQUIPMENT CO.
475 BONNIE LANE • ELK GROVE VILLAGE, IL 60007
TELEPHONE: (847) 640-7701 / 1-800-952-7225
FAX: (847) 640-0565**

480Y/277 VOLTS MAIN CIRCUIT BREAKERS

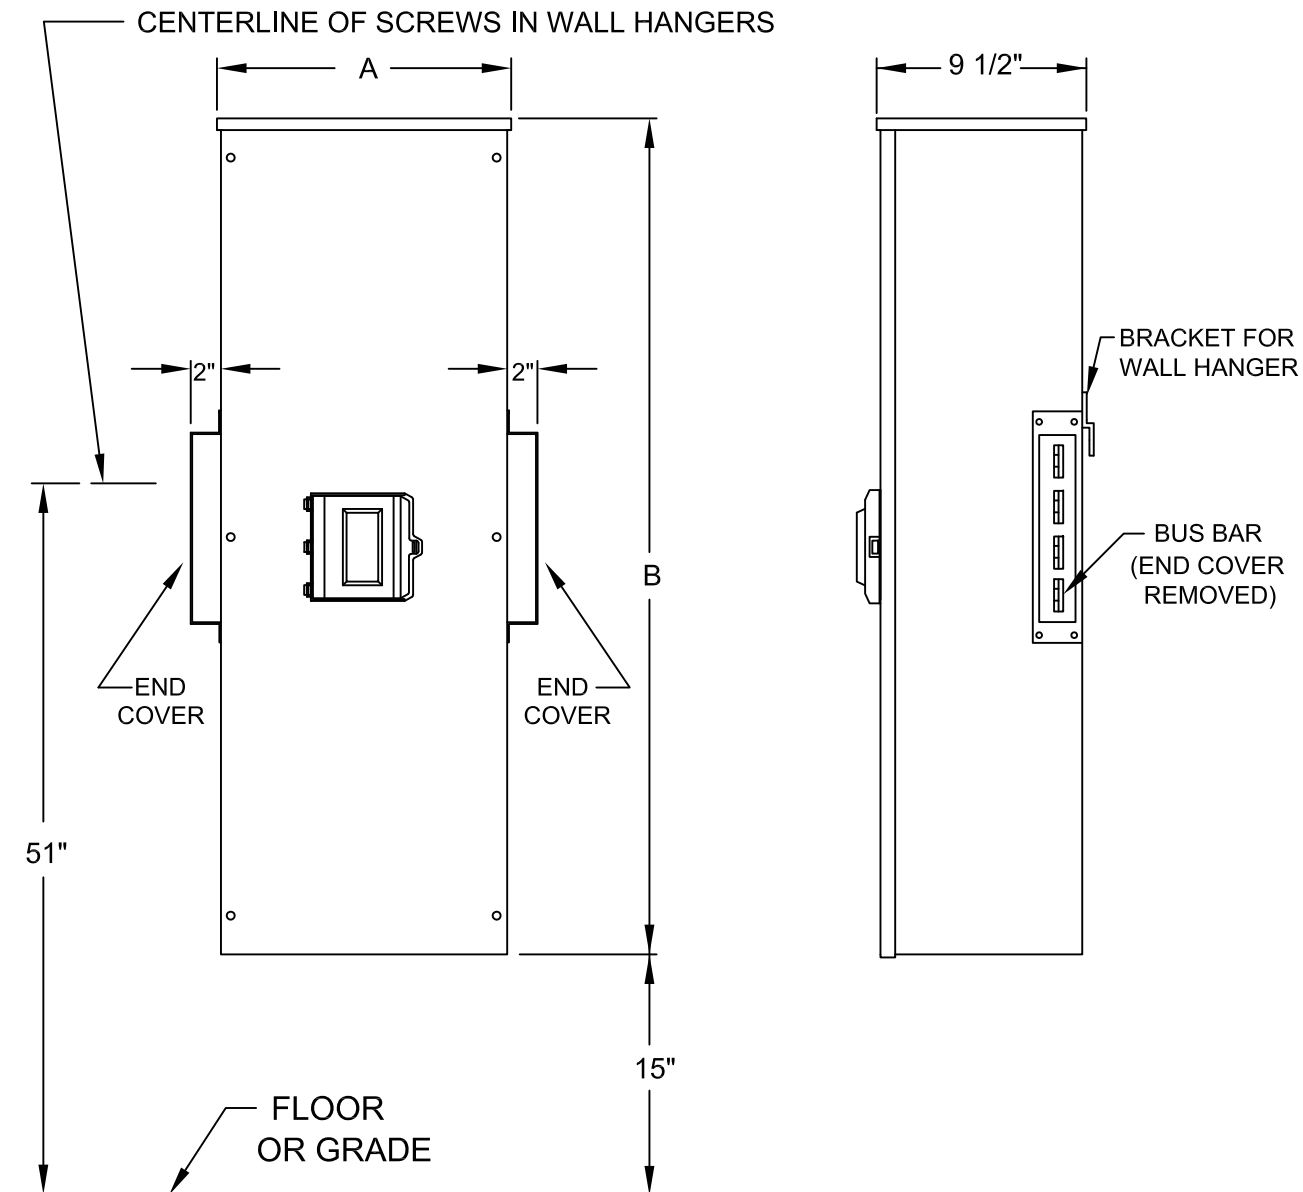

CAT.NO.	AMPS	CUTLER-HAMMER CCT.BRKR.TYPE	DIM. A	DIM. B	SHORT CIRCUIT RATING RMS SYM. AMPS. AT 480V. *
KD465N	100-400	KD	14 3/8"	64"	35,000
HKD465N	100-400	HKD	14 3/8"	64"	65,000
LD466N	300-600	LD	22 3/8"	64"	35,000
HLD466N	300-600	HLD	22 3/8"	64"	65,000
MDL467N	400-800	MDL	22 3/8"	64"	50,000
HMDL467N	400-800	HMDL	22 3/8"	64"	65,000

* SHORT CIRCUIT CURRENT RATINGS OF PANELBOARD WILL NOT EXCEED THE LOWEST SHORT CIRCUIT CURRENT RATING OF ANY MAIN OR BRANCH DEVICE.

- ENCLOSURES ARE TYPE 3R FOR OUTDOOR OR INDOOR USE.
- END COVERS ARE REMOVABLE. COVER THAT IS REMOVED WHEN CONNECTING TERMINATION BOX TO METER PANEL IS TO BE INSTALLED ON END METER PANEL UNIT.